Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

National Semiconductor

August 1989

LM733/LM733C Differential Amplifier

General Description

The LM733/LM733C is a two-stage, differential input, differential output, wide-band video amplifier. The use of internal series-shunt feedback gives wide bandwidth with low phase distortion and high gain stability. Emitter-follower outputs provide a high current drive, low impedance capability. Its 120 MHz bandwidth and selectable gains of 10, 100 and 400, without need for frequency compensation, make it a very useful circuit for memory element drivers, pulse amplifiers, and wide band linear gain stages.

The LM733 is specified for operation over the −55°C to +125°C military temperature range. The LM733C is specified for operation over the 0°C to +70°C temperature range.

Features

- 120 MHz bandwidth
- 250 kΩ input resistance
- Selectable gains of 10, 100, 400
- No frequency compensation
- High common mode rejection ratio at high frequencies

Applications

- Magnetic tape systems
- Disk file memories
- Thin and thick film memories
- Woven and plated wire memories
- Wide band video amplifiers

Connection Diagrams

Dual-In-Line Package

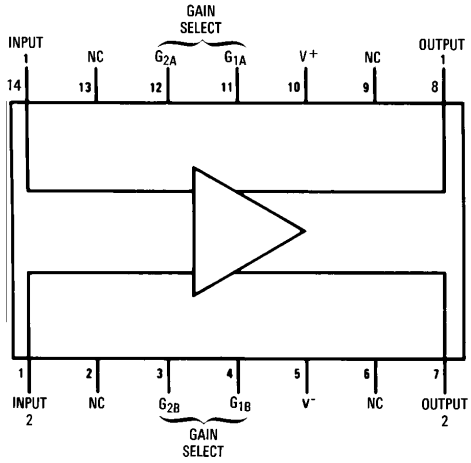

TL/H/7866–1

Top View
Order Number LM733CN
See NS Package Number N14A

Metal Can Package



TL/H/7866–2

Note: Pin 5 connected to case.

Top View
Order Number LM733H or LM733CH
See NS Package Number H10D

©1995 National Semiconductor Corporation

RRD-B30M115/Printed in U. S. A.

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Diffential Input Voltage	±5V
Common Mode Input Voltage	±6V
V_{CC}	±8V
Output Current	10 mA
Power Dissipation (Note 1)	500 mW
Junction Temperature	+150°C
Storage Temperature Range	−65°C to +150°C
Operating Temperature Range	
LM733	−55°C to +125°C
LM733C	0°C to +70°C
Lead Temperature (Soldering, 10 sec.)	260°C

Electrical Characteristics (T_A = 25°C, unless otherwise specified, see test circuits, V_S = ±6.0V)

Characteristics	Test Circuit	Test Conditions	LM733			LM733C			Units
			Min	Typ	Max	Min	Typ	Max	
Differential Voltage Gain									
Gain 1 (Note 2)			300	400	500	250	400	600	
Gain 2 (Note 3)	1		90	100	110	80	100	120	
Gain 3 (Note 4)		R_L = 2 kΩ V_{OUT} = 3 Vp-p	9.0	10	11	8.0	10	12	
Bandwidth									
Gain 1				40			40		MHz
Gain 2	2			90			90		MHz
Gain 3				120			120		MHz
Rise Time									
Gain 1		V_{OUT} = 1 Vp-p		10.5			10.5		ns
Gain 2	2			4.5	10		4.5	12	ns
Gain 3				2.5			2.5		ns
Propagation Delay		V_{OUT} = 1 Vp-p							
Gain 1				7.5			7.5		ns
Gain 2	2			6.0	10		6.0	10	ns
Gain 3				3.6			3.6		ns
Input Resistance									
Gain 1				4.0			4.0		kΩ
Gain 2			20	30		10	30		kΩ
Gain 3				250			250		kΩ
Input Capacitance		Gain 2		2.0			2.0		pF
Input Offset Current				0.4	3.0		0.4	5.0	μA
Input Bias Current				9.0	20		9.0	30	μA
Input Noise Voltage		BW = 1 kHz to 10 MHz		12			12		μVrms
Input Voltage Range	1		±1.0			±1.0			V
Common Mode Rejection Ratio									
Gain 2	1	V_{CM} = ±1V f ≤ 100 kHz	60	86		60	86		dB
Gain 2		V_{CM} = ±1V f = 5 MHz		60			60		dB
Supply Voltage Rejection Ratio									
Gain 2	1	ΔV_S = ±0.5V	50	70		50	70		dB
Output Offset Voltage									
Gain 1	1	R_L = ∞		0.6	1.5		0.6	1.5	V
Gain 2 and 3				0.35	1.0		0.35	1.5	V
Output Common Mode Voltage	1	R_L = ∞	2.4	2.9	3.4	2.4	2.9	3.4	V
Output Voltage Swing	1	R_L = 2k	3.0	4.0		3.0	4.0		
Output Sink Current			2.5	3.6		2.5	3.6		mA
Output Resistance				20			20		Ω
Power Supply Current	1	R_L = ∞		18	24		18	24	mA

Electrical Characteristics (Continued)

(The following specifications apply for $-55°C < T_A < 125°C$ for the LM733 and $0°C < T_A < 70°C$ for the LM733C, $V_S = \pm 6.0V$)

Characteristics	Test Circuit	Test Conditions	LM733			LM733C			Units
			Min	Typ	Max	Min	Typ	Max	
Differential Voltage Gain Gain 1 Gain 2 Gain 3	1	$R_L = 2\,k\Omega$, $V_{OUT} = 3$ Vp-p	 200 80 8.0		 600 120 12.0	 250 80 8.0		 600 120 12.0	
Input Resistance Gain 2			8			8			kΩ
Input Offset Current					5			6	μA
Input Bias Current					40			40	μA
Input Voltage Range	1		±1			±1			V
Common Mode Rejection Ratio Gain 2	1	$V_{CM} = \pm 1V$ f ≤ 100 kHz	50			50			dB
Supply Voltage Rejection Ratio Gain 2	1	$\Delta V_S = \pm 0.5V$	50			50			dB
Output Offset Voltage Gain 1 Gain 2 and 3	1	$R_L = \infty$			 1.5 1.2			 1.5 1.5	 V V
Output Voltage Swing	1	$R_L = 2k$	2.5			2.8			V_{pp}
Output Sink Current			2.2			2.5			mA
Power Supply Current	1	$R_L = \infty$			27			27	mA

Note 1: The maximum junction temperature of the LM733 is 150°C, while that of the LM733C is 100°C. For operation at elevated temperatures devices in the TO-100 package must be derated based on a thermal resistance of 150°C/W junction to ambient or 45°C/W junction to case. Thermal resistance of the dual-in-line package is 90°C/W.

Note 2: Pins G1A and G1B connected together.

Note 3: Pins G2A and G2B connected together.

Note 4: Gain select pins open.

Note 5: Refer to RETS733X drawing for specifications of LM733H version.

Typical Performance Characteristics

Pulse Response



Pulse Response vs Temperature



Pulse Response vs Supply Voltage



Phase Shift vs Frequency



Phase Shift vs Frequency



Differential Overdrive Recovery Time



TL/H/7866–6

Typical Performance Characteristics (Continued)

Voltage Gain vs Frequency



Gain vs Frequency Temperature



Gain vs Frequency vs Supply Voltage



Voltage Gain vs R_{ADJ}



Voltage Gain vs Temperature



Voltage Gain vs Supply Voltage



Output Voltage Swing vs Frequency



Supply Current, Output Voltage and Current Swing vs Supply Voltage



Output Voltage Swing vs Load Resistance



Common Mode Rejection Ratio vs Frequency



Input Noise Voltage vs Source Resistance



Supply Current and Input Resistance vs Temperature



TL/H/7866–7

Test Circuits

Test Circuit 1



TL/H/7866–3

Test Circuit 2

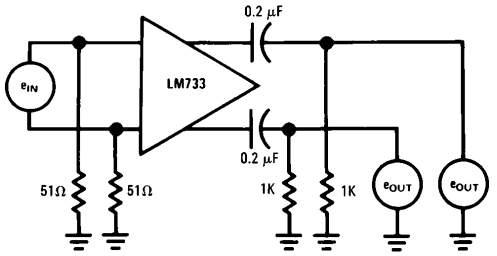

TL/H/7866–4

Voltage Gain Adjust Circuit

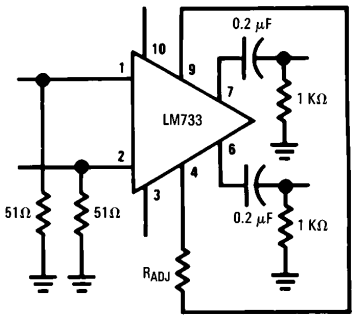

TL/H/7866–5

V_S = 6V, T_A = 25°C
(Pin numbers apply to TO-5 package)

Schematic Diagram

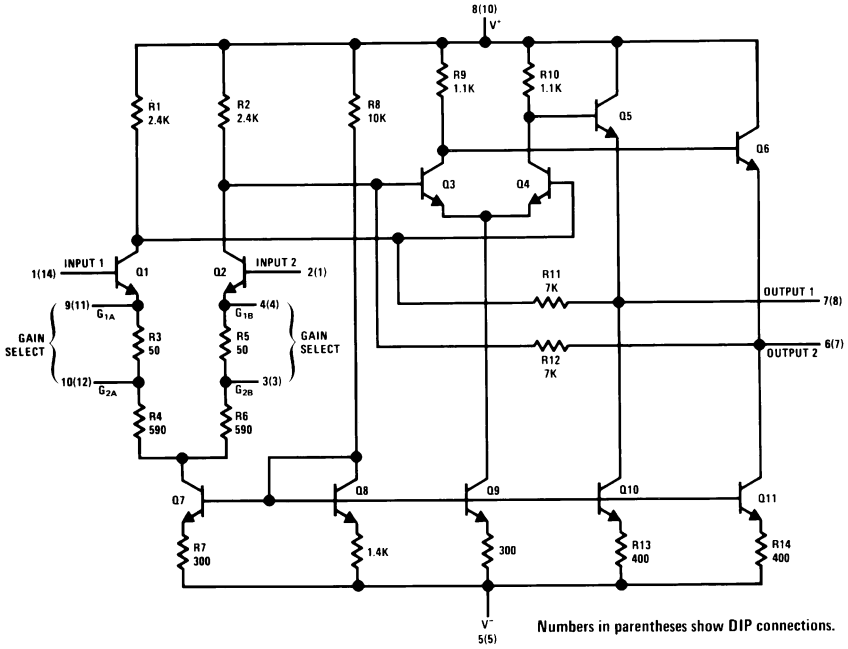

TL/H/7866–8

Physical Dimensions inches (millimeters)

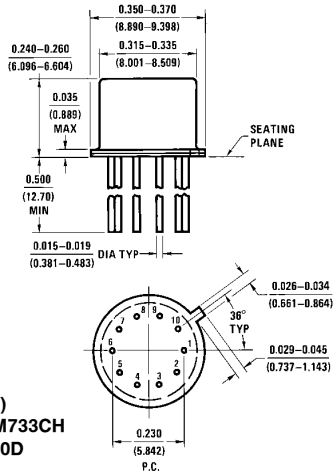

Metal Can Package (H)
Order Number LM733H or LM733CH
NS Package Number H10D

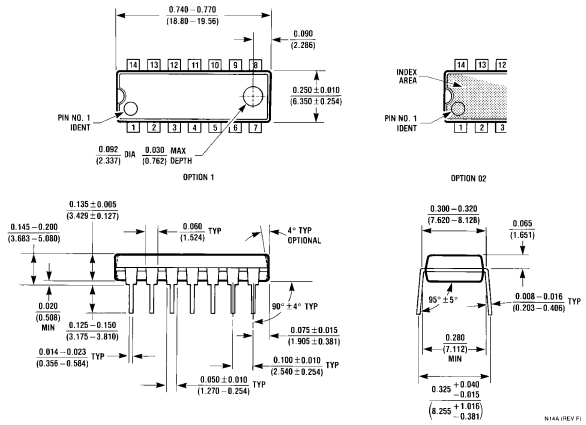

Molded Dual-In-Line Package (N)
Order Number LM733CN
NS Package Number N14A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.